

Desktop foiling and lamination from one compact unit

**Easily add decorative creativity
to printed sheets with ColorFlare**

Laminates | Foils | Holographics

- Foiling, lamination and flaring effects are possible with this single desktop solution
- Class leading affordability
- Uses 3" (77mm) core rolls providing more cost effective production
- No need to have traditional UV coating for diverse effects
- Simple in-house process - no expensive blocks or dies required



FORMATS
Max Width: 330mm
Custom lengths



MULTI FX



HEATED TOP & BOTTOM ROLLERS



**ADJUSTABLE PRESSURE
50kg/m²**



**HOUSEHOLD
220 ~ 240V**



**W = 580mm
L = 500mm
H = 430mm**

TOP FEATURES

- Ideal entry level machine for:
 - gloss & matt lamination
 - over-printable soft touch lamination
 - gloss & matt lamination
 - metallic & coloured foiling
 - holographic effect films
- Handles SRA3 + media
- Easy continuous feed
- Adjustable pressures for different applications
- Tension control
- De-curling bar for flatter sheets
- Heated top and bottom rollers designed to apply overall heat to substrates - avoids silvering of laminates
- Auto stop function to save foil waste
- Cutting knife for end of job trimming
- Air cooling offers a wider media range
- Quiet operation
- Uses conventional household 220~240V power supply

TYPICAL APPLICATIONS

- Packaging
- Presentation folders
- Business cards
- Certificates

- Menus
- Book covers
- Wedding stationery
- Labels

- Swing tickets
- Point-of-sale
- Photo albums
- Gift vouchers




Air cooling system



Easy to use controls



Tension control

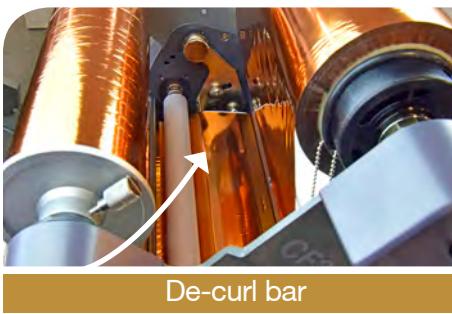

De-curl bar



Adjustable pressure



ColorFlare printer compatibility guide*

intec
PRINTING SOLUTIONS

Intec ColorFlare has been developed to work with the Intec ColorSplash series and is compatible with the world's top digital printer manufacturers.



Canon



Kodak



RICOH
imagine. change.




*Call for confirmation of model compatibility

Technical specifications*


Laminating speed	1.3m/min
Base substrate thickness	Lamination: 80gm ² to 350gm ² Foiling: 120gm ² to 350gm ²
Paper Size	Maximum: 330mm to 500mm Minimum: 180mm x 230mm
Warm-up time	5 minutes
Heating system	Infrared heater
Laminating temperature	Top roller: maximum 150°C Bottom roller: maximum 100°C
Temperature control	Control panel push button
Speed control	Control panel push button
Display system	LCD display
Roller pressure	Adjustable manual handle
Film core size	77mm (3")
Air cooling system	Dual fan system
Temperature sensing method	Internal thermo-couple
Rear trimming knife	Blade for end of job trimming
Power requirement	AC 220~240V, 50/60Hz, 7A
Power consumption	1.5kw

CF350 footprint


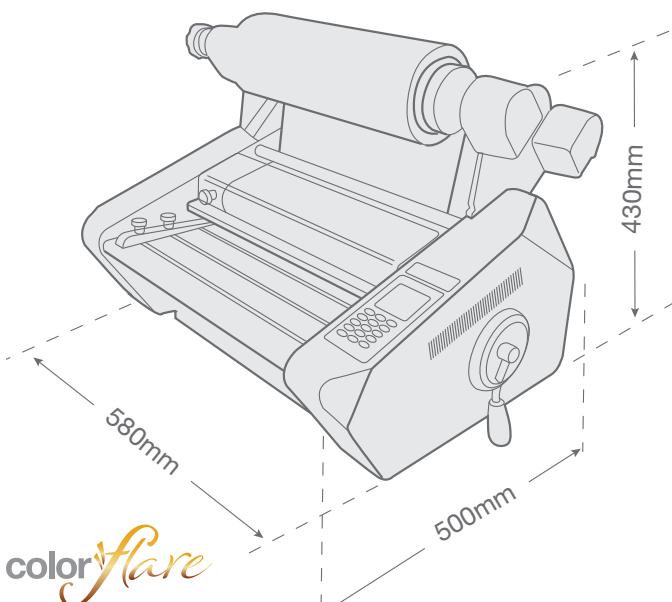


Dimensions W x L x H	Weight (kgs)
580 x 500 x 430mm	35kg

Speed chart

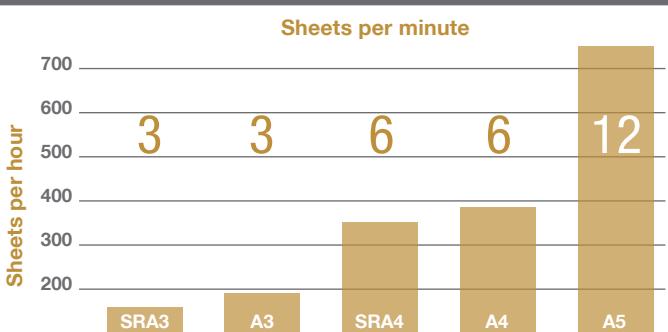

Laminates

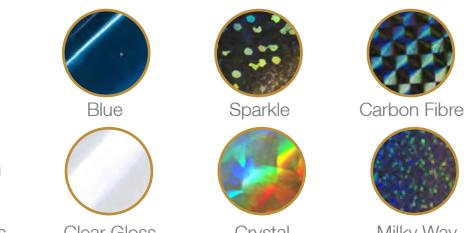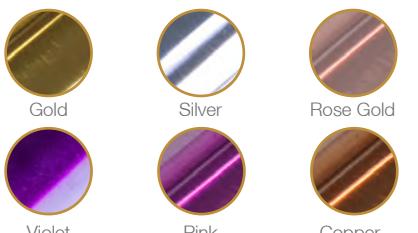

8 (495) 565-35-74
8 (800) 775-35-94
info@printer-plotter.ru
www.printer-plotter.ru



© 2018 Intec Printing Solutions. Intec brand names and products are the intellectual property and copyright of Intec Printing Solutions. All other trademarks are acknowledged. Equipment specifications are subject to change without prior notice.

All statistics are variable depending upon film, external conditions, media type, weight and formats. E&OE

